



70MHz Standard Filter

Part Number 070125

Typical Performance

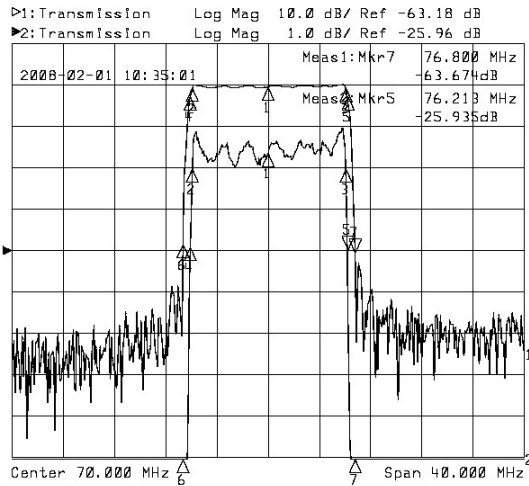

Horizontal: 4MHz/Div
Vertical: 1dB/Div&10dB/Div


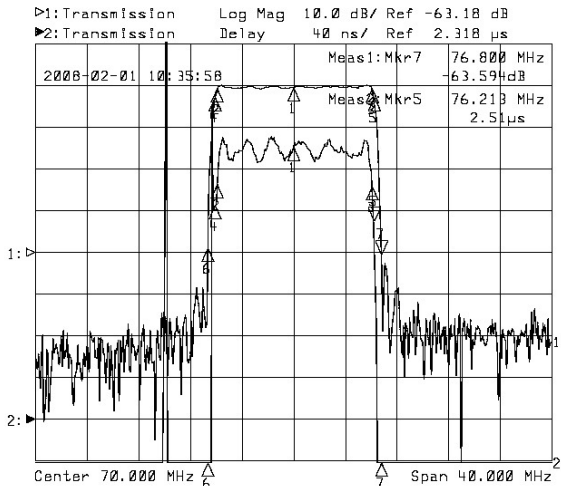


Horizontal: 4MHz/Div
Vertical: 40ns/Div&10dB/Div

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	69.90	70.00	70.10
Insertion Loss at F ₀	dB		23.50	24.50
1 dB Bandwidth	MHz	11.90	12.00	
3 dB Bandwidth	MHz	12.30	12.50	
40dB Bandwidth	MHz		13.40	13.50
Passband Variation	dB		0.80	1.00
Group Delay Variation	nsec		30	50
Absolute Delay	usec		2.58	
Ultimate Rejection	dB	48	50	
Substrate Material	-		128-LiNbO3	
Ambient Temperature	°C	-40	25	80

Package

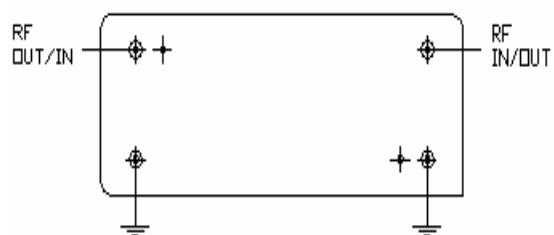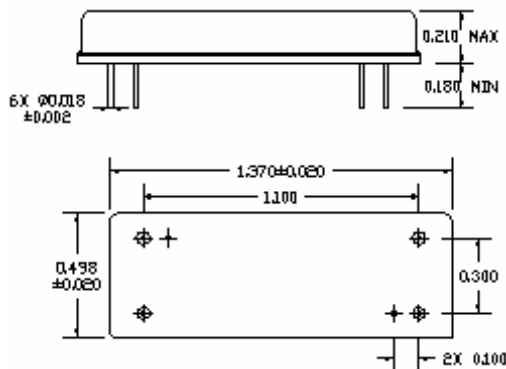

No Matching Required
 Source/Load Impedance=50ohm
 Package Style XW