



**SINEWAVE Digi-TCXO/VCTCXO IN 14 PIN DIP COMPATIBLE PACKAGE - DTCTS Series**

**FEATURES**


- Very Tight Frequency Stability over Wide Temperature Range
- Available with Voltage Control for Electric Frequency Adjustment
- Clipped Sinewave Output, Low Phase Noise
- Hermetically Sealed Package, Industry de factor Standard Footprint

**SPECIFICATIONS**

<b>Frequency Range</b>	8.0 MHz to 51.2 MHz
<b>Standard Frequency</b>	10, 12.8, 13.0, 16.384, 20.0, 26.0, 32.0, 36.864 MHz
<b>Supply Voltage (Vcc)</b>	A = 5.0 VDC $\pm$ 5%; B = 3.3 VDC $\pm$ 5%
<b>Input Current</b>	3.0 mA Max (5.0V); 2.5 mA Max (3.3V)
<b>Storage Temperature</b>	-40°C to 105°C
<b>Controllable Frequency Option</b>	V = Voltage control: $\pm$ 5 ppm Typ, Positive, 10% Linearity
<b>Control Voltage (Vc)</b>	0.5 - 4.5 VDC for Vcc = 5 VDC; 0.3 - 3.0 VDC for Vcc = 3.3 VDC
<b>Setability of Vc at Fnom, 25°C</b>	Vc = 1/2 Vcc
<b>Frequency Stability vs Temp. Temperature Range</b>	003 = $\pm$ 0.3 ppm; 005 = $\pm$ 0.5 ppm; 010 = $\pm$ 1 ppm A = 0°C to 70°C; B = -40°C to 85°C; C = -10°C to 60°C; D = -20°C to 70°C
<b>Frequency Stability vs Vcc</b>	$\pm$ 0.3 ppm Maximum / Vcc $\pm$ 5%
<b>Frequency Stability vs Load</b>	$\pm$ 0.3 ppm Maximum / $\pm$ 2 pF
<b>Aging</b>	$\pm$ 1 ppm Maximum per year @25°C
<b>Phase Noise (20MHz)</b>	-85 dBc/Hz at 10Hz; -110 dBc/Hz at 100Hz -130 dBc/Hz at 1KHz; -135 dBc/Hz at 10KHz
<b>Output Load</b>	10 pF // 10 kOhms
<b>Output Waveform</b>	Clipped Sine wave
<b>Output Level</b>	1.0Vp-p Minimum

**Creating a Part Number**

**DTCTS-20M000-A V 010 B**

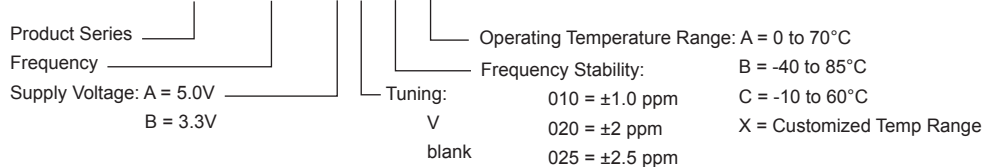

**OUTLINE DRAWING**

