

**HCMOS/TTL TCXO/VC-TCXO IN 14 PIN DIP HERMETICALLY SEALED PACKAGE - TCHC Series**


**FEATURES**

- RoHS Compliant (Pb-Free), Tight Stability over Wide Temperature Range
- Available with Voltage Control for Electric Frequency Adjustment
- HCMOS/TTL Compatible, Low Phase Noise
- Hermetically Sealed Package, Industry de factor Standard Footprint

**SPECIFICATIONS**

<b>Frequency Range</b>	1.5 MHz to 40 MHz
<b>Standard Frequency</b>	12.8/13.0/14.4/15.36/16.8/19.44 MHz
<b>Supply Voltage (Vcc)</b>	A = 5.0 VDC $\pm$ 5%; B = 3.3 VDC $\pm$ 5%
<b>Input Current</b>	20 mA Maximum (1.5 MHz to 9.999 MHz); 30 mA Maximum (10 MHz to 40 MHz)
<b>Storage Temperature</b>	-40°C to 85°C
<b>Controllable Frequency Option</b>	V = Voltage control: $\pm$ 5 ppm Minimum
<b>Control Voltage (Vc)</b>	2.5 $\pm$ 2.0 VDC for Vcc = 5 VDC; 1.65 $\pm$ 1.5 VDC for Vcc = 3.3 VDC
<b>Setability of Vc at Fnom, 25°C</b>	2.5 $\pm$ 0.5 V DC for 5.0V part; 1.65 $\pm$ 0.4 VDC for 3.3V part
<b>Frequency Stability vs Temp. Temperature Range</b>	010 = $\pm$ 1 ppm; 015 = $\pm$ 1.5 ppm; 020 = $\pm$ 2 ppm; 025 = $\pm$ 2.5 ppm; 050 = $\pm$ 5 ppm
<b>Standard Stability</b>	A = 0°C to 70°C; B = -40°C to 85°C; F = 0°C to 50°C; H = -30°C to 75°C
<b>Frequency Stability vs Vcc</b>	$\pm$ 0.3 ppm Maximum / Vcc $\pm$ 5%
<b>Frequency Stability vs Load</b>	$\pm$ 0.3 ppm Maximum / $\pm$ 2 pF
<b>Aging</b>	$\pm$ 1 ppm Maximum per year @25°C
<b>Phase Noise</b>	-145 dBc/Hz at 1KHz
<b>Output Load</b>	10 TTL or 15 pF HCMOS Maximum
<b>Logic "1" / Logic "0" Level</b>	TTL: 2.4V Minimum / 0.4V Maximum; HCMOS: 0.9Vcc Minimum / 0.1Vcc Maximum
<b>Rise/Fall Time (Tr/Tf)</b>	10 ns Maximum
<b>Duty Cycle</b>	0 = No tristate 60/40%; 2 = No tristate 55/45%

**Creating a Part Number**

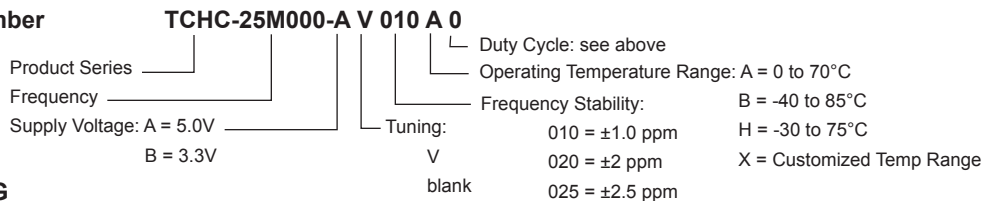

**OUTLINE DRAWING**

